

TWIST

6 - 7 - 11

4

TWIST 6 Engine 4,8 Hp, Gasoline

TWIST 7 Engine 6 Hp, Gasoline

TWIST 11 Engine 8,6 Hp, Gasoline

experience



Twist Series, 50 years of experience at your service.



Twist is the two-wheeled tractor created by Goldoni to revolutionize the quality of your work, even during your leisure time!

Twist is the result of 50 years of experience. Its qualities are the ones that have made Goldoni's professional machines famous: simplicity, manoeuvrability, safety and exceptional sturdiness.


Its potential is infinite. Just turn the handlebars through 180° and you can use all the front-mounted implements, such as: the lawn mower, mower, snow plough, scraper, etc.

KEY

The speeds are given in kph



Series TWIST					
		TWIST 6	TWIST 7	TWIST 11	
Engine					
Type		Honda GX160 Gasoline	Honda GX200 Gasoline	Honda GX270 Gasoline	
Power rating	kW/hp	3,6 (4,8)	4,1/5,6	6,3 (8,6)	
N° cylinders / nominal rate		1 to 3600 rpm/min	1 a 3600 tr/mn	1 to 3600 rpm/min	
Swept volume	cc	163	196	242	
Start		Pull start	Pull start	Pull start	
tank capacity	Lt.	3,6	3,6	6	
Transmission					
N° speeds		2 FWD + 2 RM	3 FWD + 3 REV with reverse shuttle	2 FWD + 2 RM	
Main clutch		Dry cone clutch with manual control	Dry cone clutch with manual control	Dry cone clutch with manual control	
differential lock		non	Operated with lever	non	
Wheels clutch release		Operated with lever	non	Operated with lever	
Speed	Kph	FWD: 1,52; 3,06 - REV: 1,67; 3,35	FWD: 1,4; 2,8; 5,0 - REV: 2,0; 4,0; 7,2	FWD: 1,52; 3,06 - REV: 1,67; 3,35	
3 rd speed block when REV gear is engaged			yes		
PTO					
Type		With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed	
Driver's Area					
Handlebars		Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	
GEAR STOP safety device		yes	yes	yes	
Coupling system for attachments		fast	fast	fast	
Weights and Dimensions					
Max length	mm	1717	1717	1797	
Min and max width	mm	432-522 (wheels 4.0x8")	432-522 (wheels 4.0x8")	432-522 (wheels 4.0x8")	
Weight with std wheels and cultivator included	Kg	90	90	110	
Tyres					
Tyres available		4.00x8"	4.00x8"	4.00x8"	
Hubs with adjustable cylindric wheel holder		yes	yes	yes	

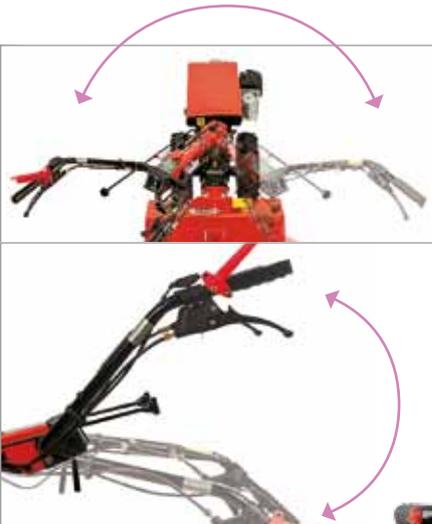

+ The height of the handlebars can be set in as many as 9 positions. This means that the two-wheeled tractor can be used by all the family for any type of work. Moreover, since the handlebars can be regulated in 5 different positions at the sides, the operator is prevented from walking over the ground he has already worked. Turning the handlebars 180° is a simple process and enables the machine to be fitted with front-mounted implements, such as: lawn mower, cultivator, snow plough, scraper, etc...



+ Device that prevents the reverse gear from being engaged when the PTO is used for cultivating work.

+ The quick coupling allows the operator to quickly and easily change the implements.



+ The external width of the wheels and the track width are adjustable. The adjustments adapt the machine to specialized crops.



+ "GEARSTOP" does not turn the engine off but it locks the transmission and the PTO, in case of release of the handlebar grip.



+ Accurate protection of the moving mechanical parts and hot parts.



TWIST

5 - 8 - 10

6

TWIST 5 Engine 5,5 Hp, Gasoline

TWIST 8 Engine 6 Hp, Gasoline

TWIST 10 Engine 8,5 Hp, Gasoline

experience



Twist Series, 50 years of experience at your service.



Twist is the two-wheeled tractor created by Goldoni to revolutionize the quality of your work, even during your leisure time!

Twist is the result of 50 years of experience. Its qualities are the ones that have made Goldoni's professional machines famous: simplicity, manoeuvrability, safety and exceptional sturdiness.


Its potential is infinite. Just turn the handlebars through 180° and you can use all the front-mounted implements, such as: the lawn mower, mower, snow plough, scraper, etc.

KEY

The speeds are given in kph



Series TWIST					
		TWIST 5	TWIST 8	TWIST 10	
Engine					
Type		Kohler CH265 Gasoline	Kohler CH270 Gasoline	Kohler CH395 Gasoline	
Power rating	KW/hp	4,1 (5,5)	4,5 (6)	6,4 (8,5)	
N° cylinders / nominal rate		1 to 3600 rpm/min	1 to 3600 rpm/min	1 to 3600 rpm/min	
Swept volume	cc	196	208	277	
Start		Pull start	Pull start	Pull start	
Tank capacity	Lt.	3,6	4	7	
Transmission					
N° speeds		2 FWD + 2 RM	2 FWD + 2 RM	2 FWD + 2 RM	
Main clutch		Dry cone clutch with manual control	Dry cone clutch with manual control	Dry cone clutch with manual control	
Differential lock		non	non	non	
Wheels clutch release		Operated with lever	Operated with lever	Operated with lever	
Speed	Kph	FWD: 1,52; 3,06 - REV: 1,67; 3,35	FWD: 1,4; 2,8; 5,0 - REV: 2,0; 4,0	FWD: 1,52; 3,06 - REV: 1,67; 3,35	
Dispositif de sécurité qui interdit l'enclenchement de la 3ème marche arrière					
Prise de force					
Type		With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed	
Driver's Area					
Handlebars		Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	
GEAR STOP safety device					
Coupling system for attachments					
Weights and Dimensions					
Max length	mm	1622	1617	1667	
Min and max width	mm	432-522 (wheels 4.0x8")	432-522 (wheels 4.0x8")	432-522 (wheels 4.0x8")	
Weight with std wheels and cultivator included	Kg	90	92	110	
Tyres					
Tyres available					
Moyeux avec porte-roue cylindrique réglable					

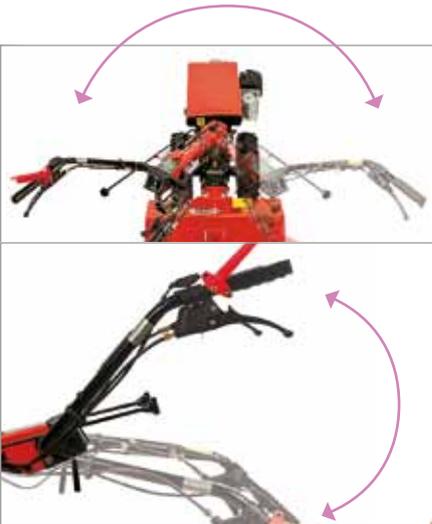

+ The height of the handlebars can be set in as many as 9 positions. This means that the two-wheeled tractor can be used by all the family for any type of work. Moreover, since the handlebars can be regulated in 5 different positions at the sides, the operator is prevented from walking over the ground he has already worked. Turning the handlebars 180° is a simple process and enables the machine to be fitted with front-mounted implements, such as: lawn mower, cultivator, snow plough, scraper, etc...



+ "GEARSTOP" does not turn the engine off but it locks the transmission and the PTO, in case of release of the handlebar grip.



+ Device that prevents the reverse gear from being engaged when the PTO is used for cultivating work.



+ Une protection efficace des pièces mécaniques en mouvement et des parties chaudes.

+ The quick coupling allows the operator to quickly and easily change the implements.



+ The external width of the wheels and the track width are adjustable. The adjustments adapt the machine to specialized crops.



TWIST

85 - 9DS
10S

8

TWIST 8S Engine 6 Hp, Gasoline

TWIST 9DS Engine 7,5 Hp, Diesel

TWIST 10S Engine 8,5 Hp, Gasoline

experience



Twist Series, 50 years of experience at your service.



Twist is the two-wheeled tractor created by Goldoni to revolutionize the quality of your work, even during your leisure time!

Twist is the result of 50 years of experience. Its qualities are the ones that have made Goldoni's professional machines famous: simplicity, manoeuvrability, safety and exceptional sturdiness.


Its potential is infinite. Just turn the handlebars through 180° and you can use all the front-mounted implements, such as: the lawn mower, mower, snow plough, scraper, etc.

KEY

The speeds are given in kph



		Series TWIST		
		TWIST 8S	TWIST 9DS	TWIST 10S
Engine				
Type		Kohler CH270 Gasoline	Lombardini 15LD350 Diesel	Kohler CH395 Gasoline
Power rating	kW/hp	4,5 (6)	5,5(7,5)	6,4 (8,5)
N° cylinders / nominal rate		1 to 3600 rpm/min	1 to 3600 rpm/min	1 to 3600 rpm/min
Swept volume	cc	208	349	277
Start		Pull start	Pull start / Electrical Starting Optional	Pull start
Tank capacity	Lt.	4	4,3	7
Transmission				
N° speeds		3 FWD + 3 REV with reverse shuttle	3 FWD + 3 REV with reverse shuttle	2 FWD + 2 REV with reverse shuttle
Main clutch		Dry cone clutch with manual control	Dry cone clutch with manual control	Dry cone clutch with manual control
Differential lock		Operated with lever	Operated with lever	non
Wheels clutch release		Operated with lever	Operated with lever	Operated with lever
Speed with wheels 5.00x10	Kph	FWD: 1,8; 3,7; 6,6 REV: 2,0; 4,0; 7,2	FWD: 1,7; 3,3; 5,9 REV: 1,8; 3,6; 6,5	FWD: 1,52; 3,06 REV: 1,67; 3,35
3 rd speed block when REV gear is engaged		yes	yes	no
PTO				
Type		With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed
Driver's Area				
Handlebars		Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°
GEAR STOP safety device		oui	yes	oui
Coupling system for attachments		rapide	fast	rapide
Weights and Dimensions				
Max length	mm	1797	1797	1667
Min and max width	mm	486-668 (Roues 5.0x10")	460-642 (wheels 4.0x10")	432-522 (Roues 4.0x8")
Weight with std wheels and cultivator included	Kg	92	110	110
Tyres				
Tyres available		5.00x8"	4.00x8"	4.00x8"
Moyeux avec porte-roue cylindrique réglable		no	no	yes

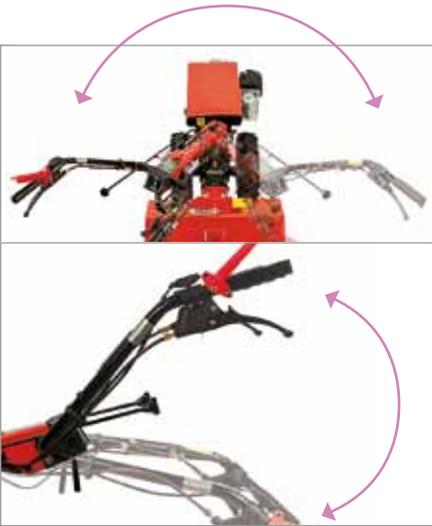

+ The height of the handlebars can be set in as many as 9 positions. This means that the two-wheeled tractor can be used by all the family for any type of work. Moreover, since the handlebars can be regulated in 5 different positions at the sides, the operator is prevented from walking over the ground he has already worked. Turning the handlebars 180° is a simple process and enables the machine to be fitted with front-mounted implements, such as: lawn mower, cultivator, snow plough, scraper, etc...



+ Device that prevents the reverse gear from being engaged when the PTO is used for cultivating work.

+ The quick coupling allows the operator to quickly and easily change the implements.



+ The external width of the wheels and the track width are adjustable. The adjustments adapt the machine to specialized crops.



+ "GEARSTOP" does not turn the engine off but it locks the transmission and the PTO, in case of release of the handlebar grip.



+ Accurate protection of the moving mechanical parts and hot parts.



TWIST S

7S+ SLIDING TRACK-WIDTH

10 **TWIST 7S+** Engine 5,6 Hp, Gasoline

experience



Twist Series, 50 years of experience at your service.

Twist is the two-wheeled tractor created by Goldoni to revolutionize the quality of your work, even during your leisure time!



Twist is the result of 50 years of experience.

Its qualities are the ones that have made Goldoni's professional machines famous: simplicity, manoeuvrability, safety and exceptional sturdiness.


Its potential is infinite. Just turn the handlebars through 180° and you can use all the front-mounted implements, such as: the lawn mower, mower, snow plough, scraper, etc.

KEY

The speeds are given in kph



Series TWIST	
TWIST 7S+	
Engine	
Type	Honda GX200 Gasoline
Power rating	kW/hp 4,1/5,6
N° cylinders / nominal rate	1 a 3600 tr/mn
Swept volume	cc 196
Start	Pull start
tank capacity	Lt. 3,6
Transmission	
N° speeds	3 FWD + 3 REV with reverse shuttle
Main clutch	Dry cone clutch with manual control
blocage différentiel	Operated with lever
wheels clutch release	non
Speed with wheels 5.00x10	Kph FWD: 1,4; 2,8; 5,0 - REV: 2,0; 4,0; 7,2
3 rd speed block when REV gear is engaged	yes
PTO	
Type	With 1 speed independent from the tractor's ground speed
Driver's Area	
Handlebars	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°
GEAR STOP safety device	yes
Coupling system for attachments	fast
Weights and Dimensions	
Max length	mm 1717
Min and max width	mm 520-786 (wheels 5.0x10") - splined disc
Weight with std wheels and cultivator included	Kg 110
Tyres	
Tyres available	5.0x10"
Adjustable splined hubs and rims	yes

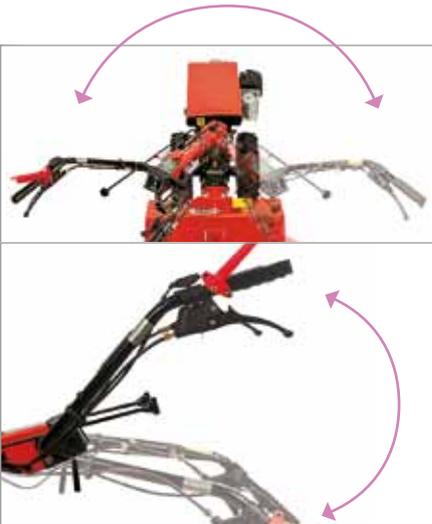

⊕ The height of the handlebars can be set in as many as 9 positions. This means that the two-wheeled tractor can be used by all the family for any type of work. Moreover, since the handlebars can be regulated in 5 different positions at the sides, the operator is prevented from walking over the ground he has already worked. Turning the handlebars 180° is a simple process and enables the machine to be fitted with front-mounted implements, such as: lawn mower, cultivator, snow plough, scraper, etc...



⊕ Device that prevents the reverse gear from being engaged when the PTO is used for cultivating work.



⊕ "GEARSTOP" does not turn the engine off but it locks the transmission and the PTO, in case of release of the handlebar grip.



⊕ The quick coupling allows the operator to quickly and easily change the implements.



⊕ Accurate protection of the moving mechanical parts and hot parts.



⊕ The external width of the wheels and the track width are adjustable. The adjustments adapt the machine to specialized crops.



TWIST S

11S - 12S

12

TWIST 11S Engine 8,6 Hp, Gasoline

TWIST 12S Engine 11 Hp, Gasoline

experience





Série Twist, 50 ans d'expérience à votre service.


Twist est le motoculteur issu de 50 ans d'expérience de Goldoni afin de révolutionner l'utilisation professionnelle et l'utilisation de loisirs. Ses qualités sont celles qui ont rendu célèbres les produits professionnels de la marque Goldoni : simplicité, maniabilité, polyvalence, sûreté et une grande fiabilité. Les possibilités sont infinies. En pivotant les Handlebars de 180° l'utilisateur peut en effet utiliser tous les équipements frontaux comme: tondeuses, faucheuses, lames etc...

KEY

The speeds are given in kph



		Series TWIST	
		TWIST 11S	TWIST 12S
Engine			
Type		Honda GX270 Gasoline	Honda GX340 Gasoline
Power rating	KW/hp	6.3 (8,6)	8 (11)
N° cylinders / nominal rate		1 to 3600 rpm/min	1 to 3600 rpm/min
Swept volume	cc	242	337
Start		Pull start	Pull start
Tank capacity	Lt.	6	6,5
Transmission			
N° speeds		3 FWD + 3 REV avec inverseur	3 FWD + 3 REV avec inverseur
Main clutch		Dry cone clutch with manual control	Dry cone clutch with manual control
Differential lock		Operated with lever	Operated with lever
Wheels clutch release		no	no
Vitesse	Kph	FWD: 1,7; 3,3; 5,9 - REV: 1,8; 3,6; 6,5	FWD: 1,7; 3,3; 5,9 - REV: 1,8; 3,6; 6,5
Dispositif de sécurité qui interdit l'enclenchement de la 3ème marche arrière			
		yes	yes
Prise de force			
Type		With 1 speed independent from the tractor's ground speed	With 1 speed independent from the tractor's ground speed
Driver's Area			
Handlebars		Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°	Assembled on elastic shock-absorbers, height adjustable in 9 positions. Single steering column in 5 positions adjustable and rotatable at 180°
GEAR STOP safety device		yes	yes
Coupling system for attachments		rapide	rapide
Weights and Dimensions			
Max length	mm	1797	1797
Min and max width	mm	460-642 (wheels 4.0x10")	460-642 (wheels 4.0x10")
Weight with std wheels and cultivator included	Kg	110	116
Tyres			
Tyres available		4.00x10"	5.0x10"

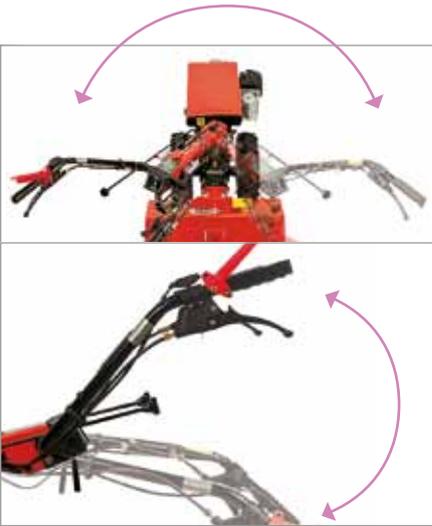

+ The height of the handlebars can be set in as many as 9 positions. This means that the two-wheeled tractor can be used by all the family for any type of work. Moreover, since the handlebars can be regulated in 5 different positions at the sides, the operator is prevented from walking over the ground he has already worked. Turning the handlebars 180° is a simple process and enables the machine to be fitted with front-mounted implements, such as: lawn mower, cultivator, snow plough, scraper, etc...



+ Device that prevents the reverse gear from being engaged when the PTO is used for cultivating work.



+ "GEARSTOP" does not turn the engine off but it locks the transmission and the PTO, in case of release of the handlebar grip.



+ Accurate protection of the moving mechanical parts and hot parts.



+ The quick coupling allows the operator to quickly and easily change the implements.

+ The external width of the wheels and the track width are adjustable. The adjustments adapt the machine to specialized crops.





Tractors for Life

The
Safety
assured by experience



**GENERAL
CATALOGUE**
TWO-WHEELED
TRACTORS

